


CROSS SECTION  
N.T.S.

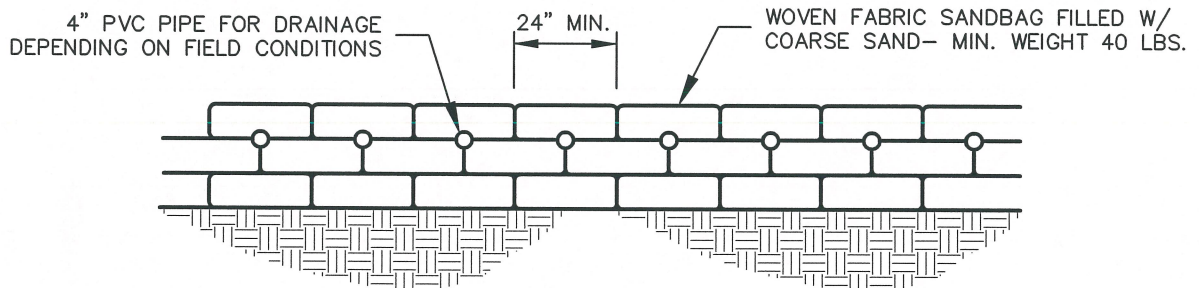

PROFILE VIEW  
N.T.S.

### SAND BAG BERM GENERAL NOTES:

1. WHEN A SANDBAG IS FILLED WITH MATERIAL, THE OPEN END OF THE SANDBAG SHOULD BE STAPLED OR TIED WITH NYLON OR POLY CORD.
2. SANDBAGS SHOULD BE STACKED IN AT LEAST THREE ROWS ABUTTING EACH OTHER, AND IN STAGGERED ARRANGEMENT.
3. THE BASE OF THE BERM SHOULD HAVE AT LEAST 3 SANDBAGS. THESE CAN BE REDUCED TO 2 AND 1 BAG IN THE SECOND AND THIRD ROWS RESPECTIVELY.
4. FOR EACH ADDITIONAL 6" OF HEIGHT, AN ADDITIONAL SANDBAG MUST BE ADDED TO EACH ROW WIDTH.
5. THE SANDBAG BERM SHALL BE INSPECTED AFTER EACH 1/2" RAIN EVENT AND SHALL BE RESHAPED OR REPLACED AS NEEDED DURING INSPECTION. REPAIRS SHALL BE MADE FOR WASHOUT, CONSTRUCTION TRAFFIC DAMAGE, ETC.
6. WHEN SILT REACHES A DEPTH EQUAL TO 6 INCHES (THE HEIGHT OF ONE SANDBAG), THE SILT SHALL BE REMOVED AND DISPOSED OF AT AN APPROVED SITE AND IN SUCH A MANNER AS TO NOT CREATE A SILTATION PROBLEM.
7. WHEN THE SITE IS COMPLETELY STABILIZED, THE BERM AND ACCUMULATED SEDIMENT SHALL BE REMOVED AND DISPOSED OF IN AN APPROVED MANNER.



Sand-Bag.dwg  
ACAD DRAWING NAME

NOV 03

DATE DRAWN

1080-00

STANDARD DRAWING NO.

CITY OF WICHITA FALLS, TX

SAND BAG BERM

APPROVED

*Jeffrey Hogan P.E.*  
CITY ENGINEER

NOV 2003  
DATE

NO.	DATE	DESCRIPTION	BY
R	E	V	I
S	I	O	N
S			

DISCLAIMER:  
The use of this standard is governed by the City of Wichita Falls Engineering Department. No warranty of any kind is made by the City of Wichita Falls for any purpose whatsoever. The City of Wichita Falls assumes no responsibility for the conversion of this standard to other formats for incorrect results or damages resulting from its use.